




Technical Specifications

Parameter	Value
Electrical	
Frequency Range	40 – 50 GHz
Linearity	±1.00 dB
VSWR (Input/Output)	2.0:1 Max.
Mechanical	
1.85 Connectors Mates with MII-STD-348	Passivated Stainless Steel
Housing	6061 Aluminum with Trivalent Coating



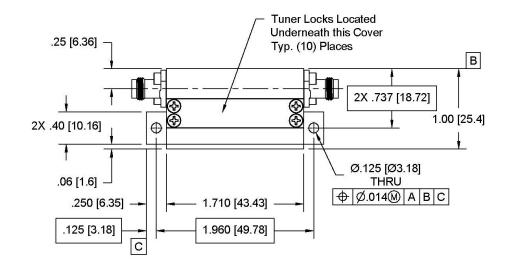



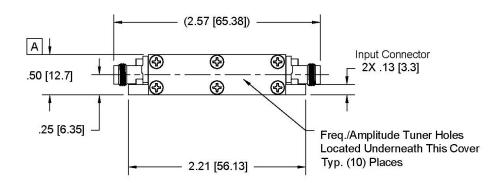

^{**}Dimensions in brackets are expressed in millimeters and are for reference only.

