

RF ATTENUATOR

MODEL *TG9006*

Available as: TG9006, 5 Pin TO-8 (T5)
 TNG9006, 4 Pin Surface Mount (SM3)
 BXG9006, Connectorized Housing (H6)
 FPG9006, 4 Pin FP-2



Features

- 5 MHz to 1600 MHz
- Low Insertion Loss
- Operating Temp. - 55 °C to + 85 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency (MHz)	5 - 1600 MHz	5 - 1600 MHz
Insertion Loss (Vc = 12) (dB)		
5-500 MHz	2.0	2.3 Max.
5-1000 MHz	2.2	2.5 Max.
5-1600 MHz	2.5	3.5 Max.
Max Attenuation (dB)		
5-500 MHz	33	31 Min.
5-1000 MHz	27	25 Min.
5-1600 MHz	23	18 Min.
VSWR (Input/Output)		
5-500 MHz	1.75:1	2.0:1 Max.
5-1000 MHz	1.75:1	2.0:1 Max.
5-1600 MHz	2.2:1	2.5:1 Max.
Flatness over Freq. (dB)		
5-500 MHz	±0.15	±0.25 Max.
5-1000 MHz	±0.5	±1.0 Max.
5-1600 MHz	±0.7	±1.5 Max.
Bias Power	Vdc	
	mA	
	+12	+12
	5.5	10 Max.
Control Power	Vdc	
	mA	
	0 to +12	0 to +12
	6.5	0 to 7 Max.
Switching Speed (µsec)	40	60 Max.

Note: Care should always be taken to effectively ground the case of each unit.

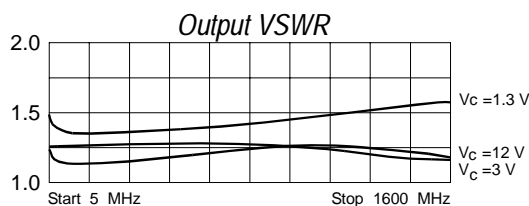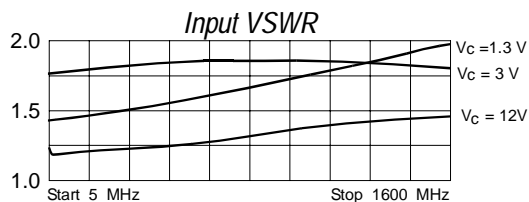


ECN 4-16-2026: Corrected datasheet documentation to be in-line with original design expectations of 5-1600 MHz along the Min Max column.

Maximum (NO DAMAGE) Ratings


Ambient Operating Temperature -55 °C to + 100 °C
 Storage Temperature -62 °C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 15 Volts
 Continuous RF Input Power + 20 dBm
 Short Term RF Input Power ... 200 Milliwatts (1 Minute Max.)
 Maximum Peak Power 1 Watt (3 µsec Max.)

Revision April 16, 2026

Typical Performance Data

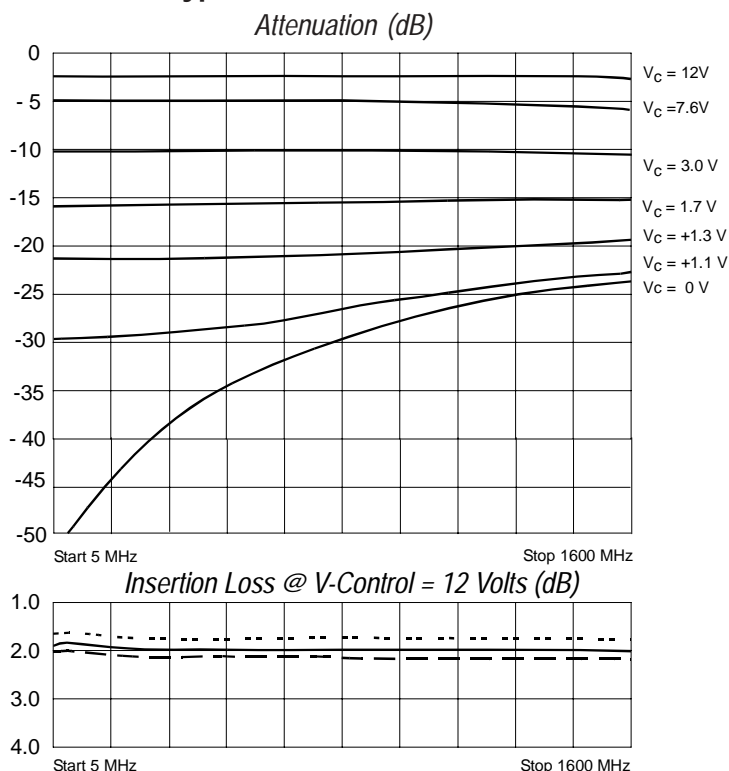

Mechanical Outline

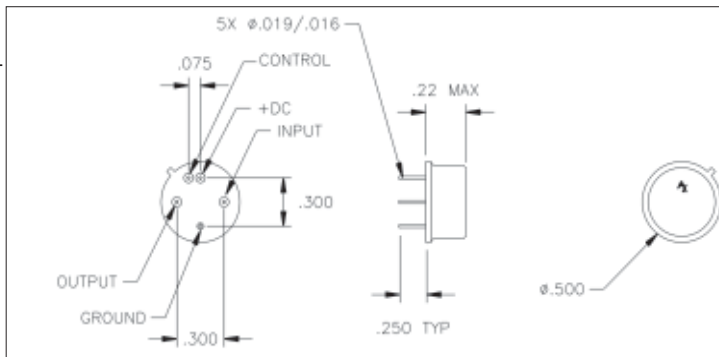

Legend ——— + 25 °C - - - + 85 °C - - - - - -55 °C