


High Frequency Microwave Amplifier

Frequency Range: 17-27 GHz

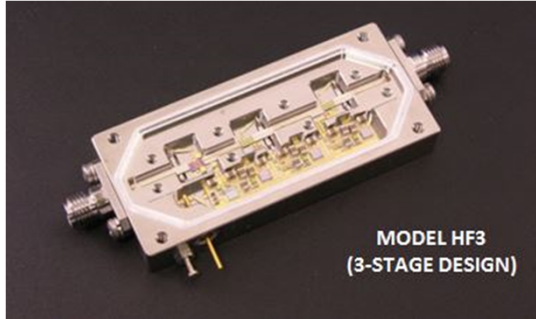

Features

- High Frequency and Broad Bandwidth: 17-27 GHz
- High Gain: 45 dB Typical
- Laser Welded Housing for Ultimate Environmental Protection
- Internal Voltage Regulator
- RoHS Compliant Option: Model BXHF1068LF



Model BXHF1068 is a high frequency amplifier covering 17-27 GHz. This design utilizes a laser sealed housing for superior environmental protection. This standard design may also be ordered in a screened MIL-STD-883 version (Model #SXHF1068.) All specification ratings are based on measurements in a 50 Ω (ohm) system with a DC supply voltage tolerance of +/- 2%.

Technical Specifications

Parameter	Unit	Typical	Min/Max
Frequency Range	GHz	17-27	17-27
Gain	dB	45	43 Min.
Noise Figure	dB	4.5	6.0 Max.
Output Power @ 1 dB Compression	dBm	27.5	27 Min.
Output 3 rd Order Intercept	dBm	35	-
Output 2 nd Order Intercept	dBm	55	-
Reverse Isolation	dB	50	-
Input VSWR	---	1.5:1	2.0:1 Max.
Output VSWR	---	1.5:1	2.0:1 Max.
Supply Voltage	volts	+12	+12
Supply Current	mA	900	950 Max.

Maximum Ratings

Maximum (No Damage) Ratings	
Storage Temperature	-55°C to +85°C
Operating Temperature	-40°C to +85°C
DC Voltage @ 25°C	+15 volts
Input Drive @ 25°C (CW)	+13 dBm


* Typical values are measured at 25°C, but not guaranteed.

Mechanical & Electrical


Parameter	Specification
Specification Temperatures (Min/Max)	-20°C to +70°C
Housing Size	2.370" L x 1.060" W x 0.300" H
Housing Drawing	HF3 Package
RF Connectors	SMA Female Replaceable Connectors

Typical Performance Graphs


Gain (dB)

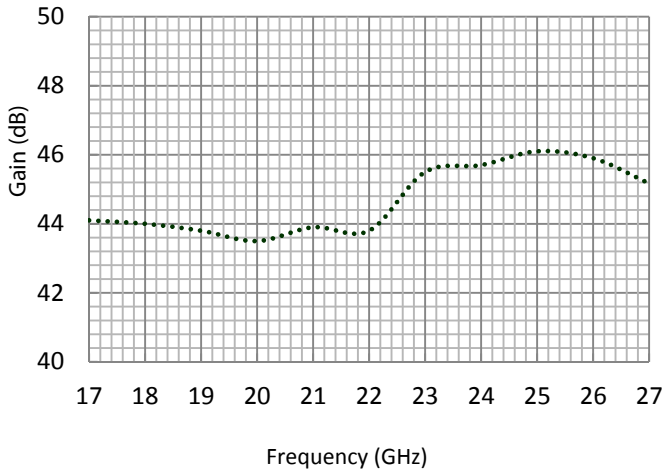


Noise Figure (dB)

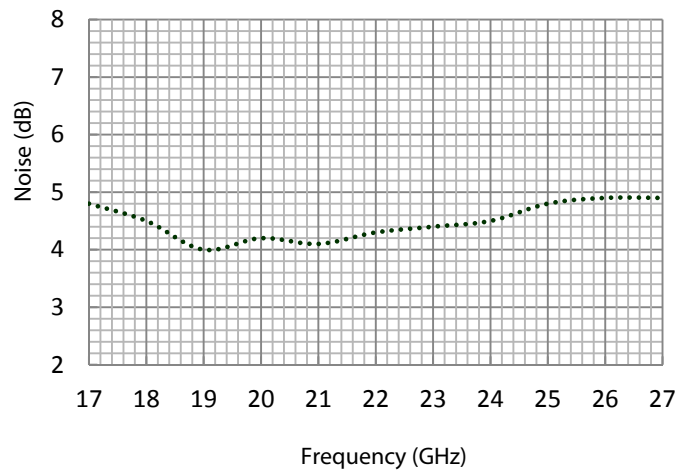


1 dB Compression (dBm)

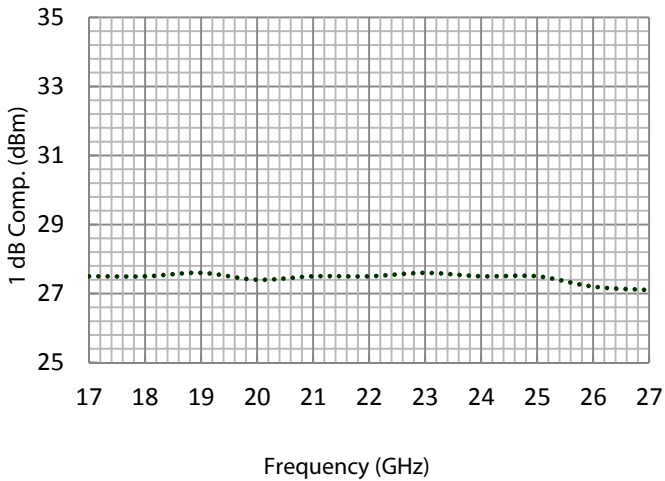


Reverse Isolation (dB)

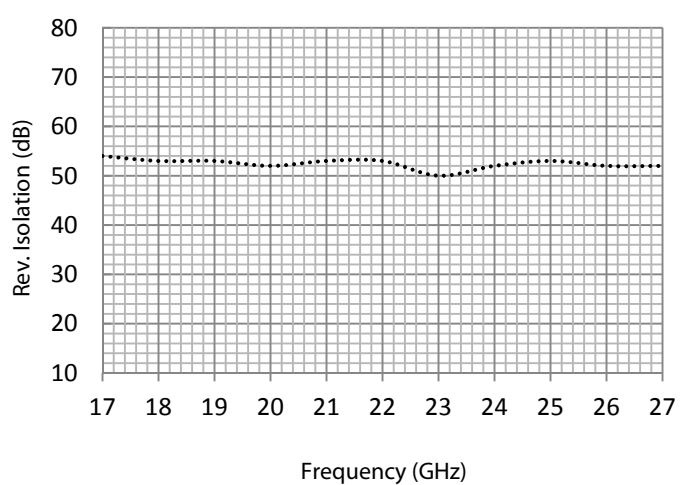

3rd Order Intercept (dBm)

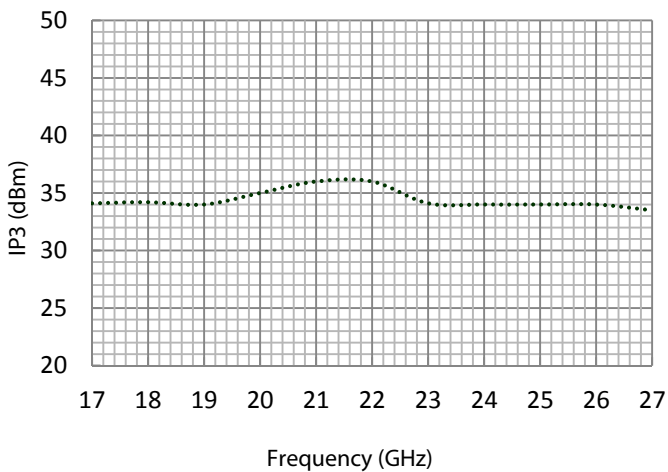


2nd Order Intercept (dBm)

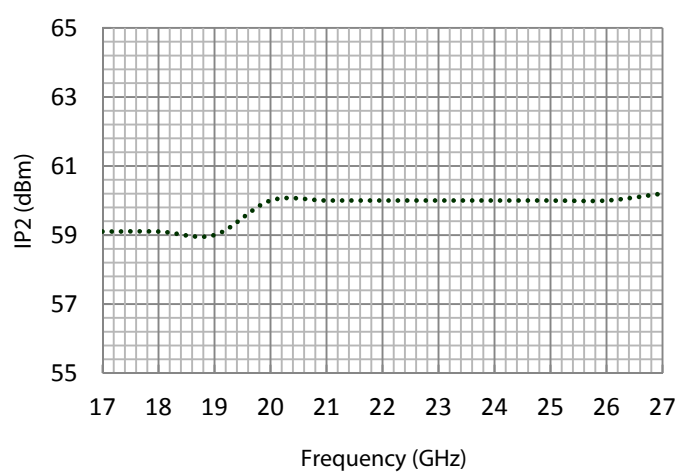


Typical Performance Graphs

Input VSWR

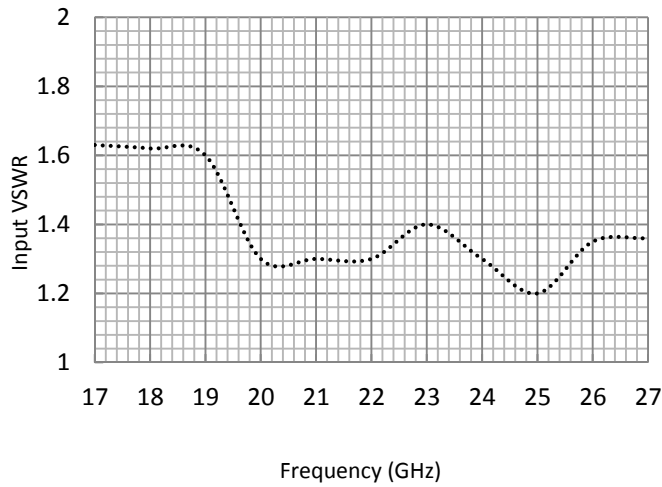

Output VSWR

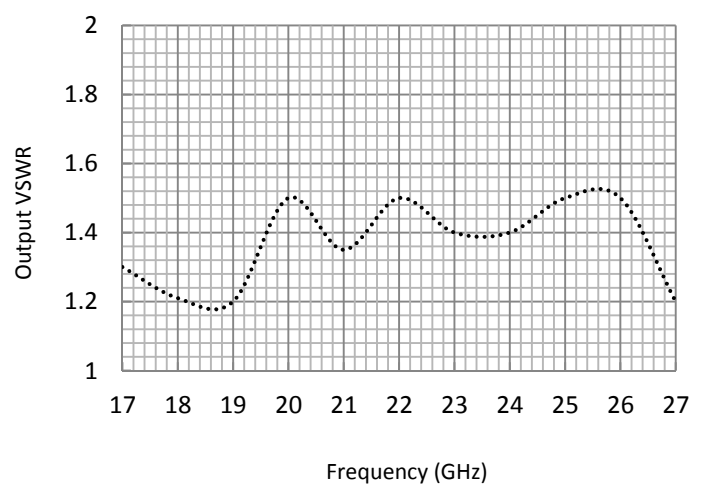

Instructions

Grounding Instructions	Care should be taken to effectively ground each unit.
Revisions	Spectrum Control reserves the right to make revisions to both product and/ or the information contained within their datasheets without advanced notice.
Min./Max. Values	Specifications are guaranteed when tested in a 50 Ω (ohm) system.
Typical performance graphs and values are measured at 25°C, but not guaranteed.	

Outline Drawing

