

RF AMPLIFIER

MODEL QBH-1423

Available as: QBH-1423, 4 Pin TO-8 (T4)
QBH-5023, 4 Pin Surface Mount (SM3)
 QBH-8997, 10 Pin, 0.500" Sq. LCA Package
 QBH-9-1423, SMA Connectorized Housing

Features

- Superior Phase Noise Performance
- Similar to "1023" Design
- Operating Temp. - 55 °C to +85 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	10 - 1000 MHz	10 - 1000 MHz
Gain (dB)	13.0	12.0 Min.
Gain Flatness (dB)	±0.25	±0.75 Max.
Power @ 1 dB Comp. (dBm) (10-640 MHz) (640-1000 MHz)	27.0 25.5	25.5 Min. 24.0 Min.
Reverse Isolation (dB)	-17	-15 Max.
Noise Figure (dB)	6.0	9.0 Max.
VSWR In	1.5:1	2.0:1 Max.
VSWR Out	1.5:1	2.0:1 Max.
Power Vdc	+15	+15
mA	195	210 Max.

Notes: Care should always be taken to effectively ground the case of each unit.
 Measured in a 50 Ohm system @ +15 Volts DC nominal unless otherwise noted.

Typical Intermodulation Performance at 25 °C

Second Order Harmonic Intercept Point +46 dBm (Typ.)
 Second Order Two Tone Intercept Point +40 dBm (Typ.)
 Third Order Two Tone Intercept Point +34 dBm (Typ.)

Absolute (NO DAMAGE) Maximum Ratings

Ambient Operating Temperature -55°C to +100 °C
 Storage Temperature -62°C to +125 °C
 Case Temperature +125 °C
 DC Voltage +17 Volts
 Continuous RF Input Power¹ +17 dBm
 Short Term RF Input Power¹ 100 Milliwatts (1 Minute Max.)

¹ RF Output terminated into 50 Ohms.


MTBF Calculation for Ground Benign Environment @ 25 °C

.....1,674,483.59 hrs

Revision July 23, 2024

ECN: PO from 28 to 27 dBm

Typical Performance Data

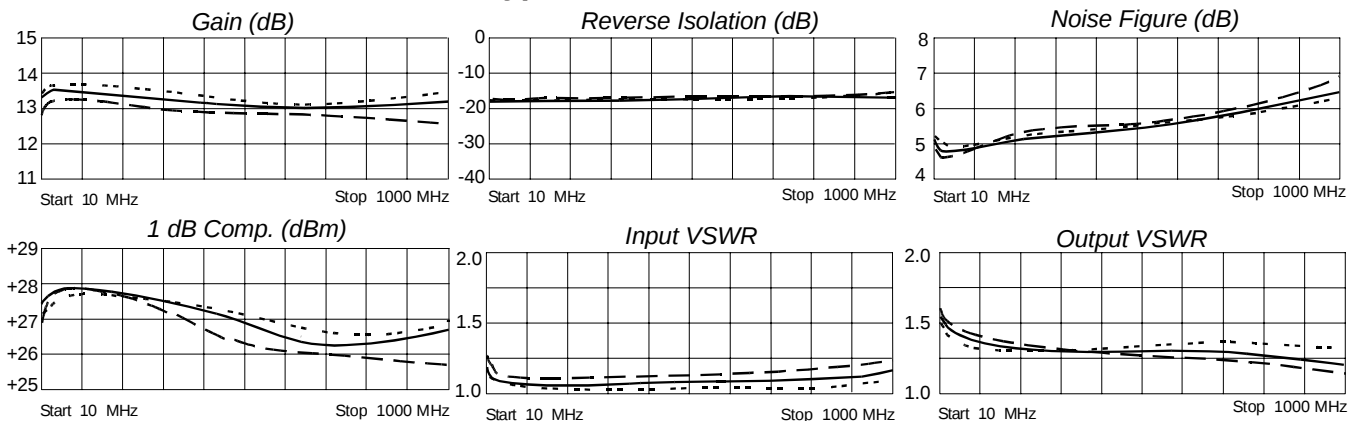

Legend ——— +25 °C - - - +85 °C -55 °C

Linear S-Parameters Data

FREQ. MHz	Mag	Ang	Mag	Ang	Mag	Ang	Mag	Ang
10	0.11	-61.9	4.70	-172.3	0.11	8.8	0.23	151.8
250	0.02	-83.6	4.66	116.7	0.11	-34.4	0.14	148.5
500	0.01	-171.7	4.55	54.5	0.12	-70.5	0.14	124.8
750	0.02	126.7	4.49	-7.5	0.13	-109.3	0.15	97.0
1000	0.05	15.7	4.51	-70.8	0.14	-151.2	0.13	40.7
1200	0.12	-44.2	4.58	-123.8	0.15	173.5	0.13	-25.7
1300	0.16	-70.8	4.60	-151.8	0.15	155.1	0.14	-68.5

