

RF AMPLIFIER

MODEL *TM5103*

Available as: TM5103, 4 Pin TO-8 (T4)
 TN5103, 4 Pin Surface Mount (SM3)
 WN5103, 10 Pin Gullwing (SG4)
 BX5103, Connectorized Housing (H1)

Features

- High Third Order Intercept: +36 dBm Typical
- High Output Power: +23 dBm Typical
- Operating Temp. - 55 °C to +85 °C
- RoHS Compliant

Specifications

CHARACTERISTIC	TYPICAL Ta = 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	5 - 300 MHz	5 - 300 MHz
Gain (dB)	11.5	10.0 Min.
Power @ 1 dB Comp. (dBm)	+23	+21.0 Min.
Reverse Isolation (dB)	-14.5	---
VSWR In	1.25:1	2.0:1 Max.
Out	1.25:1	2.0:1 Max.
Noise Figure (dB)	5.0	6.5 Max.
Power Vdc	+15	+15
mA	85	92 Max.

Note: Care should always be taken to effectively ground the case of each unit.

Typical Intermodulation Performance at 25 °C

Second Order Harmonic Intercept Point..... +51 dBm (Typ.)
 Second Order Two Tone Intercept Point..... +45 dBm (Typ.)
 Third Order Two Tone Intercept Point..... +36 dBm (Typ.)


Maximum (No Damage) Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 18 Volts
 Continuous RF Input Power + 13 dBm
 Short Term RF Input Power.... 100 Milliwatts (1 Minute Max.)
 Maximum Peak Power..... 0.2 Watt (3 µsec Max.)

Revision: September 9, 2016

ECN: Continous RF Input Reduced from +18 dBm to +13 dBm
 Addition of the SG4 package: New Option Model WN5103
 Reverse Isolation: Min/Max removed

Typical Performance Data

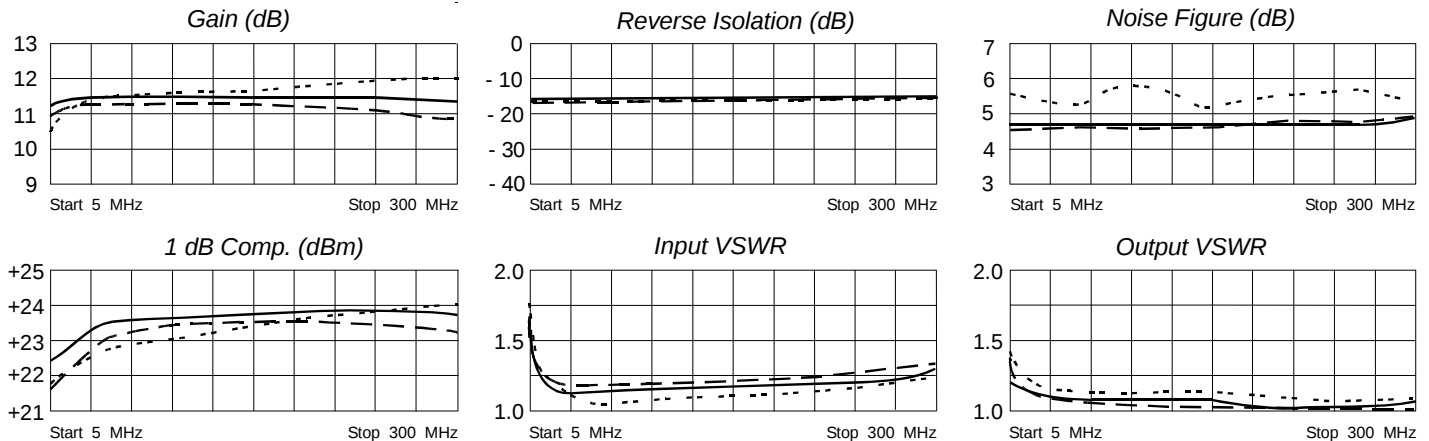

Legend ——— + 25 °C --- + 85 °C -55 °C

Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
5	.21	-65	3.63	-160	.15	10	.10	81
10	.12	-63	3.73	-171	.15	5	.06	61
25	.06	-48	3.78	178	.15	3	.04	29
50	.04	-26	3.80	169	.15	2	.04	6
100	.05	-13	3.81	155	.16	3	.04	-23
150	.07	-20	3.84	141	.16	3	.03	-51
200	.09	-34	3.85	127	.17	3	.03	-88
250	.11	-50	3.85	113	.18	2	.03	-147
300	.13	-68	3.80	97	.19	1	.05	159
350	.15	-88	3.67	80	.20	-1	.08	126
400	.15	-108	3.42	63	.20	-5	.12	98



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532

www.spectrummicrowave.com Spectrum Microwave · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001