

RF AMPLIFIER

MODEL *TM5122PM*

Available as: TM5122PM, 4 Pin TO-8 (T4)
 TN5122PM, 4 Pin Surface Mount (SM3)
 FP5122PM, 4 Pin Flatpack (FP4)
 BX5122PM, Connectorized Housing (H1)

Features

- Superior Phase Noise Performance
- Output Power: +20 dBm Typical
- Operating Temp. -55 °C to +85 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	10-500 MHz	10-500 MHz
Gain (dB)	17	15.5 Min.
Power @ 1 dB Comp. (dBm)	+20	+ 19 Min.
Reverse Isolation (dB)	-22	-20 Max.
VSWR In	1.8:1	2.0:1 Max.
VSWR Out	1.8:1	2.0:1 Max.
Noise Figure (dB)*	4.2	4.6 Max.
Power Vdc mA	+15 60	+15 65 Max.

Note: Care should always be taken to effectively ground the case of each unit.

VDC +/- 1 %

* NF 6 dB over Temp above 450 MHz

Typical Intermodulation Performance at 25 °C

Second Order Harmonic Intercept Point +43 dBm (Typ.)
 Second Order Two Tone Intercept Point +38 dBm (Typ.)
 Third Order Two Tone Intercept Point +30 dBm (Typ.)

Maximum (NO DAMAGE) Ratings

Ambient Operating Temperature -55°C to +100 °C
 Storage Temperature -62°C to +125 °C
 Case Temperature +125 °C
 DC Voltage +18 Volts
 Continuous RF Input Power +13 dBm
 Short Term RF Input Power 100 mW (1 Minute Max.)
 Maximum Peak Power 0.5 Watt (3 µsec Max.)


Guaranteed Phase Noise Performance (dBc/Hz) *

Frequency	Typical	Guarantee (min.)
100 Hz	-150	-146
1 kHz	-165	-161
10 kHz	-170	-166
100 kHz	-172	-168
1 MHz	-172	-168

ECN: Residual Phase Performance adjustments to the Table and NF over 450 MHz

Revision: 3-17-2021

Typical Performance Data

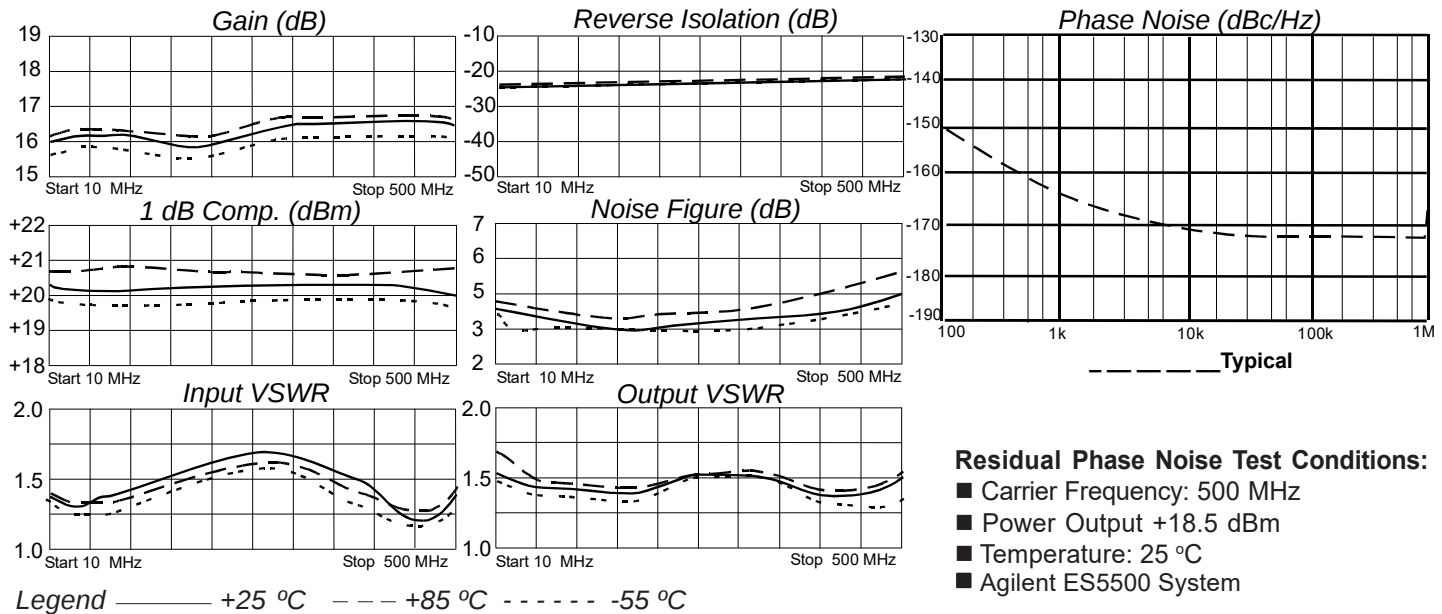

Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
5	.16	-76	6.84	-156	.09	-155	.15	-33
50	.04	-87	7.19	166	.09	163	.08	20
100	.07	-94	7.15	148	.09	145	.12	23
200	.15	-123	7.16	114	.10	108	.18	3
300	.24	-159	7.21	80	.11	75	.18	-30
400	.29	155	7.38	43	.11	41	.16	-82
500	.29	89	7.30	1	.11	5	.19	-161



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532

www.SpectrumMicrowave.com Spectrum Microwave · 2707 Black Lake Place · Philadelphia, Pennsylvania 19154 · PH (215) 464-4000 · Fax (215) 464-4001