


## Technical Specifications

Parameter	Value
<i>Electrical</i>	
Frequency Range	DC – 50 GHz
VSWR	DC – 18 GHz 1.10:1 max. 18 – 26.5 GHz 1.20:1 max. 26.5 – 50 1.30:1 max.
Impedance	50 Ohms
Operation Temp. Range	-65°C to +125°C

Parameter	Value
<i>Mechanical</i>	
2.4mm Connectors	Passivated Stainless Steel
Conductors	Gold Plated Beryllium Copper


### Model Number AA-5150

Male / Female Connectors

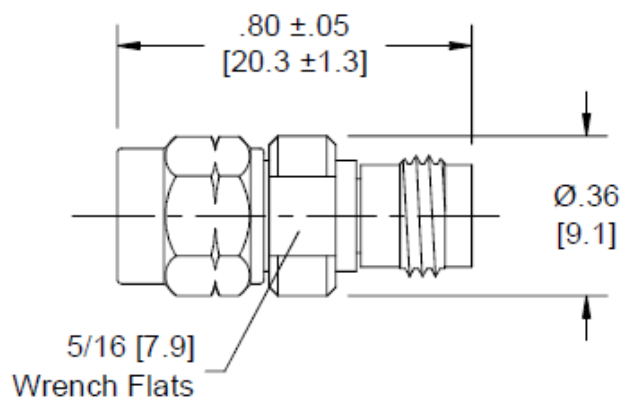


### Model Number 5149

Male / Male Connectors

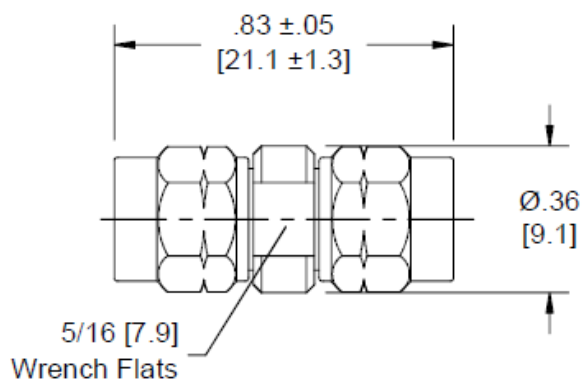

### Model Number 5148

Female / Female Connectors

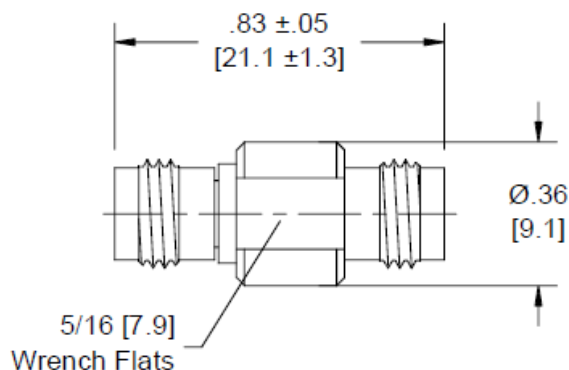

\*\*Dimensions in brackets are expressed in millimeters and are for reference only.