

Adapters, In-Series SMA

DC – 26.5 GHz


MODELS: 5163, 5164, 5165

Technical Specifications


Parameter	Value
<i>Electrical</i>	
Frequency Range	DC – 26.5 GHz
VSWR	1.20:1 max.
Impedance	50 Ohms
Operation Temp. Range	-65°C to +125°C

Parameter	Value
<i>Mechanical</i>	
Connectors Mates with MIL-STD-348	Passivated Stainless Steel
Conductors	Gold Plated Beryllium Copper


Model Number 5163 Female/Female Connectors

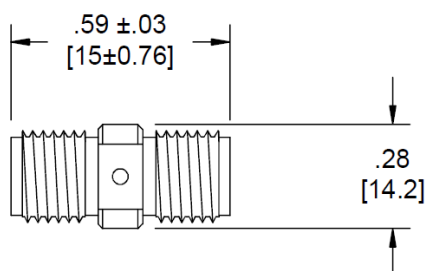

Model Number 5164 Male/Male Connectors

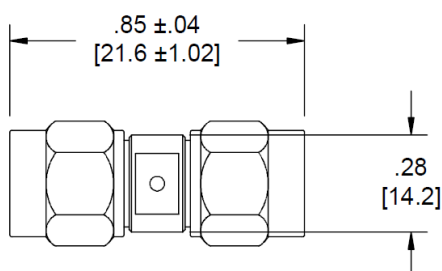

Model Number 5165 Male/Female Connector

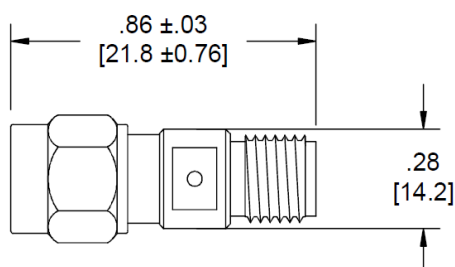

**Dimensions in brackets are expressed in millimeters and are for reference only.

sales@am.spectrumcontrol.com

Approved for Release: January 2025/Brown

Spectrum Control reserves the right to make changes to datasheets at any time without notice.