


## **Technical Specifications**

Parameter	Value
Electrical	
Frequency Range	See below
VSWR  DC - 4 GHz 4 - 8 GHz 8 - 18 GHz 18 - 26.5 GHz  Nominal Impedance  Operation Temp. Range	1.10:1 max. 1.15:1 max.
Mechanical	
Connectors Mates with MIL-STD-348	Passivated Stainless Steel
Conductors	Gold Plated Beryllium Copper
Nut & Washer	Passivated Stainless Steel
O-Ring	Silicone Rubber



Recommended Mounting Hole


## **Model Number 5211**

Frequency Range: DC-18 GHz

## Model Number AA-5218

Frequency Range: DC-26.5 GHz

<sup>\*\*</sup>Dimensions in brackets are expressed in millimeters and are for reference only.

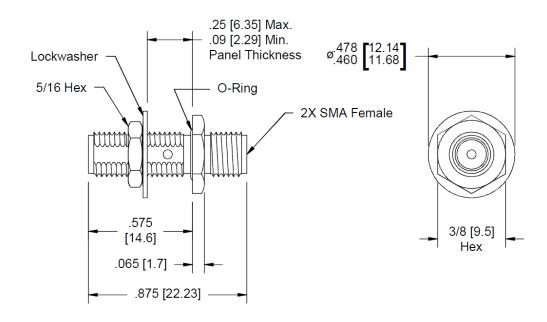

Panel nut, lock washer and O-ring are shipped unassembled.

