



Technical Specifications


Parameter	Value
<i>Electrical</i>	
Frequency Range	DC – 34 GHz
VSWR	1.30:1 max.
Impedance	50 Ohms
Operation Temp. Range	-65°C to +125°C

Parameter	Value
<i>Mechanical</i>	
3.5mm Connectors Mates both mechanically and electrically with all SMA, and K* series connectors.	Passivated Stainless Steel
1.85mm Connectors Mates with 2.4mm and V* connectors.	Passivated Stainless Steel
Conductors	Gold Plated Beryllium Copper

*V and *K are trademarks of Anritsu Corp.


Model Number 5254

3.5mm Female / 1.85mm Male

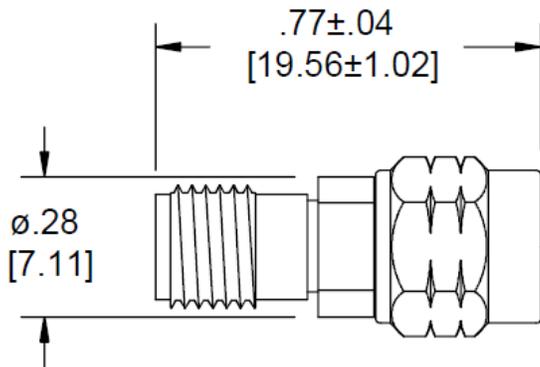


Model Number 5255

3.5mm Male / 1.85mm Female

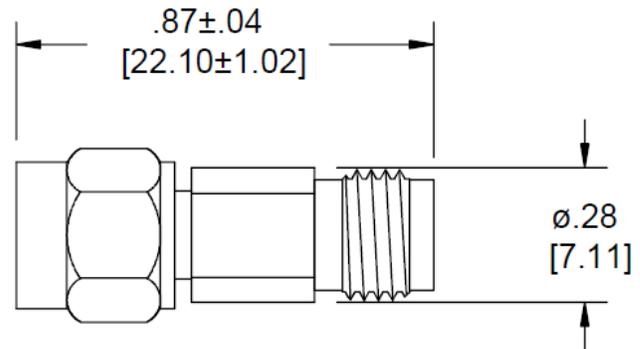


Model Number AA-5256

3.5mm Female / 1.85mm Female

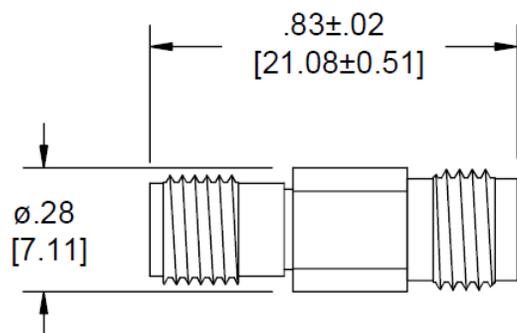

Model Number AA-5257

3.5mm Male / 1.85mm Male

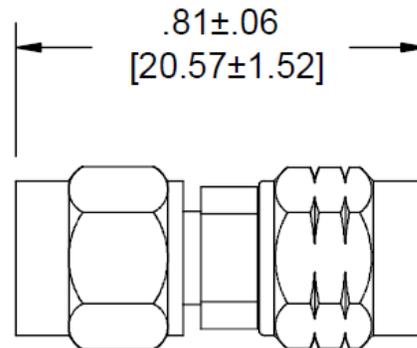

**Dimensions in brackets are expressed in millimeters and are for reference only.