


Technical Specifications

Parameter	Value
Electrical	
Frequency Range	DC – 65 GHz
VSWR	DC – 26.5 GHz 1.25:1 max. 26.5 – 50 GHz 1.35:1 max. 50 – 65 GHz 1.40:1 max.
Impedance	50 Ohms
Operation Temp. Range	-65°C to +125°C
Mechanical	
Connectors Mates with 2.4mm and V* connectors	Passivated Stainless Steel
Conductors	Gold Plated Beryllium Copper
O-Ring	70 Durometer Buna N

*V is a trademark of Anritsu Corp.

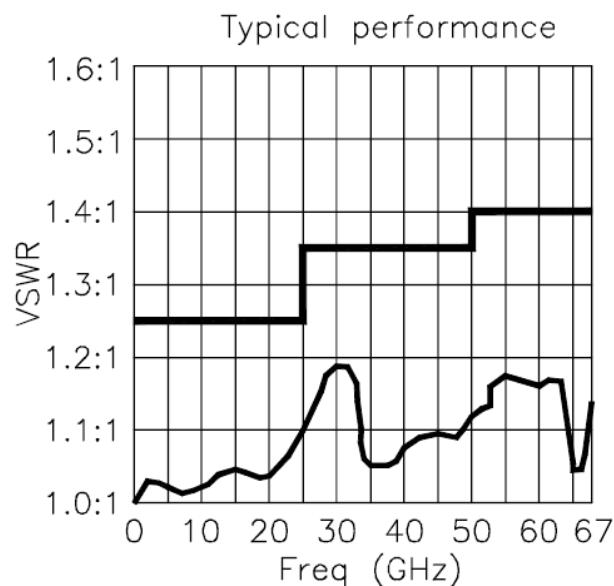



Model Number 5289

Includes O-ring

Model Number 5290

No O-ring included

Recommended
Mounting Hole

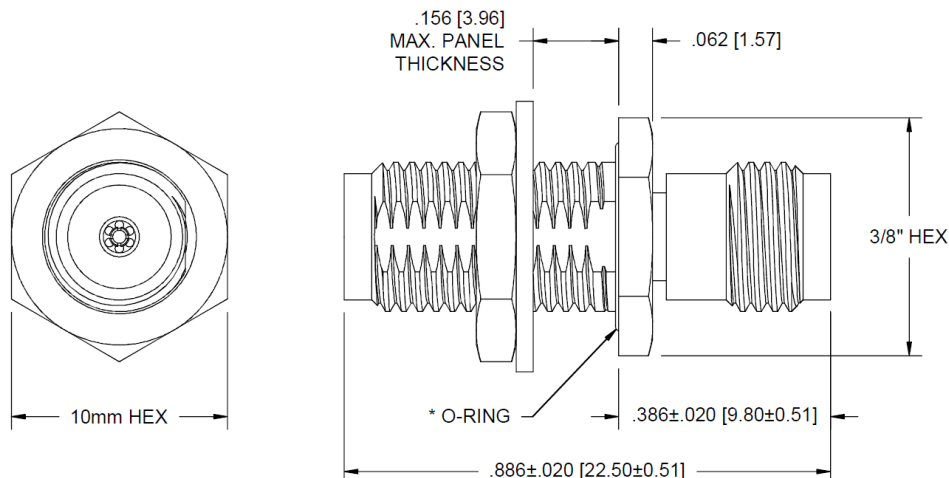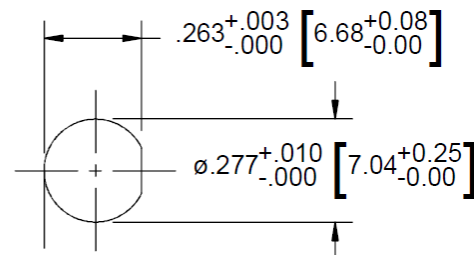

**Dimensions in brackets are expressed in millimeters and are for reference only.

Panel nut, lock washer and O-ring are shipped unassembled.

sales@am.spectrumcontrol.com

Approved for Release: November 2024/Brown

Spectrum Control reserves the right to make changes to datasheets at any time without notice.