

RF AMPLIFIER

MODEL *TM6149*

Available as: TM6149, 4 Pin TO-8B (T4)
 TN6149, 4 Pin Surface Mount (SM3)
 FP6149, 4 Pin Flatpack (FP4)
 BX6149, Connectorized Housing (H1)

Features

- Medium Gain: 15.3 dB Typical
- Medium Output Power: +16 dBm Typical
- Operating Temp. - 55 °C to + 85 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC		TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency (MHz)		5 - 500 MHz	5 - 500 MHz
Gain (dB)		15.3	14.5 Min.
Power @ 1 dB Comp. (dBm)		+16	+14.5 Min.
Reverse Isolation (dB)		-19	-18 Max.
VSWR	In Out	<1.25:1 <1.25:1	2:0:1 Max. 2:0:1 Max.
Noise figure (dB)		<5.0	6.0 Max.
Power	Vdc mA	+15 45	+15 48 Max.

Note: Care should always be taken to effectively ground the case of each unit.


Typical Intermodulation Performance at 25 °C

Second Order Harmonic Intercept Point +47 dBm (Typ.)
 Second Order Two Tone Intercept Point +41 dBm (Typ.)
 Third Order Two Tone Intercept Point +30 dBm (Typ.)

Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 18 Volts
 Continuous RF Input Power + 13 dBm
 Short Term RF Input Power 50 Milliwatts (1 Minute Max.)
 Maximum Peak Power 0.5 Watt (3 µsec Max.)

Typical Performance Data

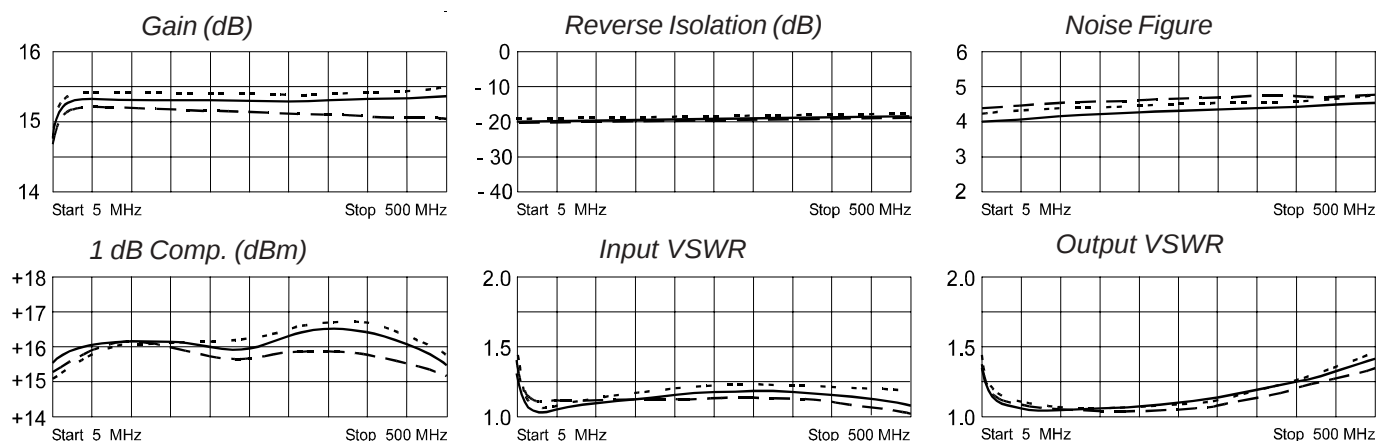

Legend ——— + 25 °C - - - - + 85 °C -55 °C

Linear S-Parameters

FREQ. MHZ	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
5	.14	-66	5.58	-167	.09	13	.14	119
50	.02	22	5.85	172	.09	1	.01	93
100	.03	49	5.81	161	.09	-2	.01	-171
200	.07	52	5.78	141	.10	-7	.03	-160
300	.08	44	5.75	121	.10	-12	.05	169
400	.08	41	5.75	101	.11	-17	.09	140
500	.05	50	5.71	79	.12	-25	.14	110
600	.06	136	5.67	56	.13	-34	.22	77



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 06/29/04

www.spectrummicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001