

RF AMPLIFIER

MODEL *TM6180*

Available as: TM6180, 4 Pin TO-8 (T4)
 TN6180, 4 Pin Surface Mount (SM3)
 FP6180, 4 Pin Flatpack (FP4)
 BX6180, Connectorized Housing (H1)

Features

- High Gain: 16.5 dB Typical
- High Output Power: +18 dBm Typical
- Operating Temp. - 55 °C to +85 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	5 - 600 MHz	10 - 500 MHz
Gain (dB)	16.5	15.5 Min.
Power @ 1 dB Comp. (dBm)	+18	+15 Min.
Reverse Isolation (dB)	-22	-19.0 Max.
VSWR In	<1.4:1	2.1:1 Max.
Out	<1.5:1	2.2:1 Max.
Noise figure (dB)	3.4	4.5 Max.
Power Vdc	+15	+15
mA	63	75 Max.

Note: Care should always be taken to effectively ground the case of each unit.


Typical Intermodulation Performance at 25 °C

Second Order Harmonic Intercept Point +51 dBm (Typ.)
 Second Order Two Tone Intercept Point +45 dBm (Typ.)
 Third Order Two Tone Intercept Point +33 dBm (Typ.)

Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 17 Volts
 Continuous RF Input Power + 15 dBm
 Short Term RF Input Power 100 Milliwatts (1 Minute Max.)
 Maximum Peak Power 0.5 Watt (3 µsec Max.)

Typical Performance Data

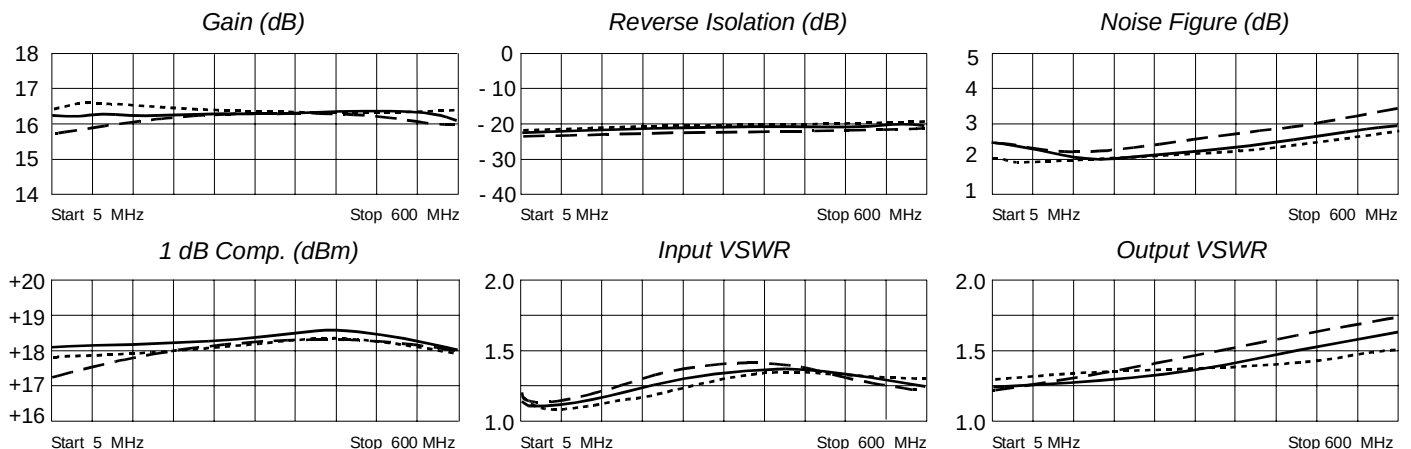

Legend ——— + 25 °C - - - + 85 °C -55 °C

Linear S-Parameters

FREQ. MHz	---- S11 ----		---- S21 ----		---- S12 ----		---- S22 ----	
	Mag.	Deg.	Mag.	Deg.	Mag.	Deg.	Mag.	Deg.
5	.16	- 76	6.49	-156	.09	-155	.15	- 33
50	.04	- 87	6.48	166	.09	163	.08	20
100	.07	- 94	6.44	148	.09	145	.12	23
200	.15	-123	6.46	114	.10	108	.18	3
300	.24	-159	6.50	80	.11	75	.18	- 30
400	.29	155	6.65	41	.11	41	.16	- 82
500	.29	89	6.58	1	.11	5	.19	-161



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 02/08/05

www.spectrummicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001