

RF AMPLIFIER

MODEL *TM6533*

Available as: TM6533, 4 Pin TO-8 (T4)
 TN6533, 4 Pin Surface Mount (SM3)
 FP6533, 4 Pin Flatpack (FP4)
 BX6533, Connectorized Housing (H1)

Features

- High Gain: 16.5 dB Typical
- Medium Output Power: +17 dBm Typical
- Operating Temp. - 55 °C to +85 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	5 - 500 MHz	5 - 500 MHz
Gain (dB)	16.5	15.0 Min.
Power @ 1 dB Comp. (dBm)	+17	+15.0 Min.
Reverse Isolation (dB)	-18.5	-17 Max.
VSWR In	<1.5:1	2.0:1 Max.
Out	<1.5:1	2.0:1 Max.
Noise figure (dB)	3.5	5.5 Max.
Power Vdc	+15	+15
mA	50	55 Max.

Note: Care should always be taken to effectively ground the case of each unit.


Typical Intermodulation Performance at 25 °C

Second Order Harmonic Intercept Point +48 dBm (Typ.)
 Second Order Two Tone Intercept Point +42 dBm (Typ.)
 Third Order Two Tone Intercept Point +32 dBm (Typ.)

Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 18 Volts
 Continuous RF Input Power + 13 dBm
 Short Term RF Input Power..... 50 Milliwatts (1 Minute Max.)
 Maximum Peak Power 0.5 Watt (3 µsec Max.)

Typical Performance Data

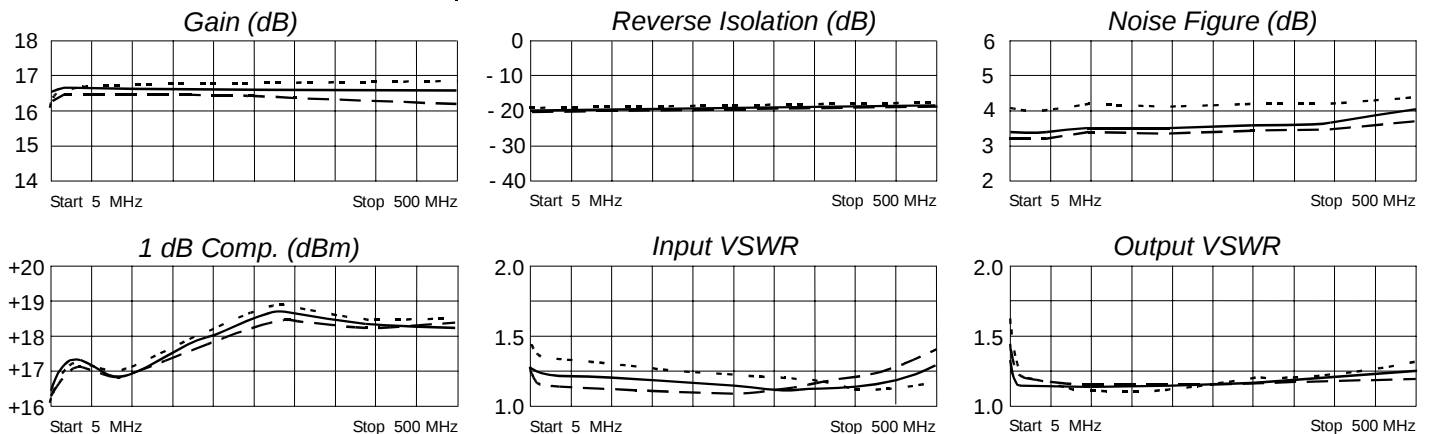

Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
5	.13	-121	6.73	-170	.09	11	.15	136
50	.09	-180	6.90	171	.10	-0	.06	161
100	.08	170	6.88	159	.09	-1	.05	170
200	.07	161	6.85	138	.10	-2	.05	171
300	.05	170	6.79	117	.10	-4	.07	162
400	.07	-164	6.79	94	.11	-8	.09	148
500	.13	-158	6.71	70	.12	-12	.12	122



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 11/15/04

www.spectrummicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001