

RF AMPLIFIER

MODEL *TM6558*

Available as: TM6558, 4 Pin TO-8 (T4)
 TN6558, 4 Pin Surface Mount (SM3)
 FP6558, 4 Pin Flatpack (FP4)
 BX6558, Connectorized Housing (H1)

Features

- High Third Order Intercept: +36 dBm Typical
- High Output Power: 19 dBm Typical
- Operating Temp. - 55 °C to +85 °C
- Environmental Screening Available

Specifications

CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	5 - 500 MHz	5 - 500 MHz
Gain (dB)	12	10.5 Min.
Power @ 1 dB Comp. (dBm)	+19.0	+17.5 Min.
Reverse Isolation (dB)	-16	----
VSWR In	<1.5:1	2.0:1 Max.
Out	<1.5:1	2.0:1 Max.
Noise figure (dB)	4.8	5.5 Max.
Power Vdc	+15	+15
mA	65	72 Max.

Note: Care should always be taken to effectively ground the case of each unit.

Typical Intermodulation Performance at 25 °C


Second Order Harmonic Intercept Point.....+53 dBm (Typ.)
 Second Order Two Tone Intercept Point.....+48 dBm (Typ.)
 Third Order Two Tone Intercept Point.....+36 dBm (Typ.)

Maximum (No Damage) Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 18 Volts
 Continuous RF Input Power + 18 dBm
 Short Term RF Input Power 50 Milliwatts (1 Minute Max.)
 Maximum Peak Power 0.5 Watt (3 µsec Max.)

Revision 1-6-2015

Typical Performance Data

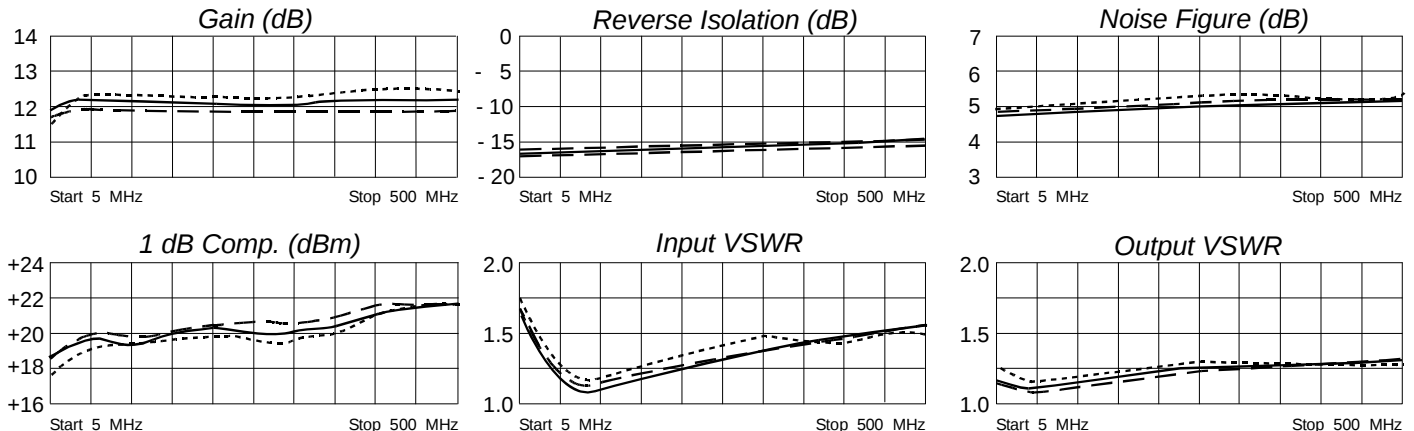

Legend ——— + 25 °C - - - + 85 °C -55 °C

Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
5	.21	-65	3.93	-160	.14	6	.07	40
50	.04	-2	4.07	168	.14	-3	.06	10
100	.07	13	4.05	153	.14	-7	.07	8
200	.12	-1	3.99	125	.14	-15	.09	-10
300	.17	-25	3.97	97	.15	-25	.11	-40
400	.20	-48	4.00	68	.15	-35	.12	-72
500	.20	-71	4.05	39	.16	-45	.14	-114
600	.16	-87	4.12	7	.17	-58	.15	-166
700	.09	-57	4.01	-30	.19	-73	.17	130
800	.25	-28	3.52	-70	.20	-94	.22	63



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532

www.spectrummicrowave.com Spectrum Microwave · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001