

RF AMPLIFIER

MODEL *TM7111PM*

Available as: TM7111PM, 4 Pin TO-8 (T4)
 TN7111PM, 4 Pin Surface Mount (SM3)
 FP7111PM, 4 Pin Flatpack (FP4)
 BX7111PM, Connectorized Housing (H1)

Features

- Superior Phase Noise Performance
- Low Noise Figure: 1.4 dB Typical
- Output Power: +17dBm Typical
- Operating Temp. -55 °C to +85 °C

Specifications

CHARACTERISTIC	TYPICAL Ta = 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	10 - 100 MHz	10 - 100 MHz
Gain (dB)	12.5	11.0 Min.
Power @ 1 dB Comp. (dBm)	+17	+15.5 Min.
Reverse Isolation (dB)	-15	-14 Max.
VSWR In	<1.75:1	2.0:1 Max.
Out	<1.75:1	2.0:1 Max.
Noise Figure (dB)	1.4	2.0 Max.
Power Vdc	+15	+15
mA	14	15 Max.

Note: Care should always be taken to effectively ground the case of each unit.

Typical Intermodulation Performance at 25 °C

Second Order Harmonic Intercept Point +53 dBm (Typ.)
 Second Order Two Tone Intercept Point +47 dBm (Typ.)
 Third Order Two Tone Intercept Point +33 dBm (Typ.)


Maximum Ratings

Ambient Operating Temperature -55°C to +100 °C
 Storage Temperature -62°C to +125 °C
 Case Temperature +125 °C
 DC Voltage +18 Volts
 Continuous RF Input Power +13 dBm
 Short Term RF Input Power 50 Milliwatts (1 Minute Max.)
 Maximum Peak Power 0.5 Watt (3 µsec Max.)

Guaranteed Phase Noise Performance (dBc/Hz)

Frequency	Typical	Guarantee (Min.)
100 Hz	-156	-152
1 kHz	-157	-153
10 kHz	-158	-154
100 kHz	-165	-161
1 MHz	-165	-161

Typical Performance Data

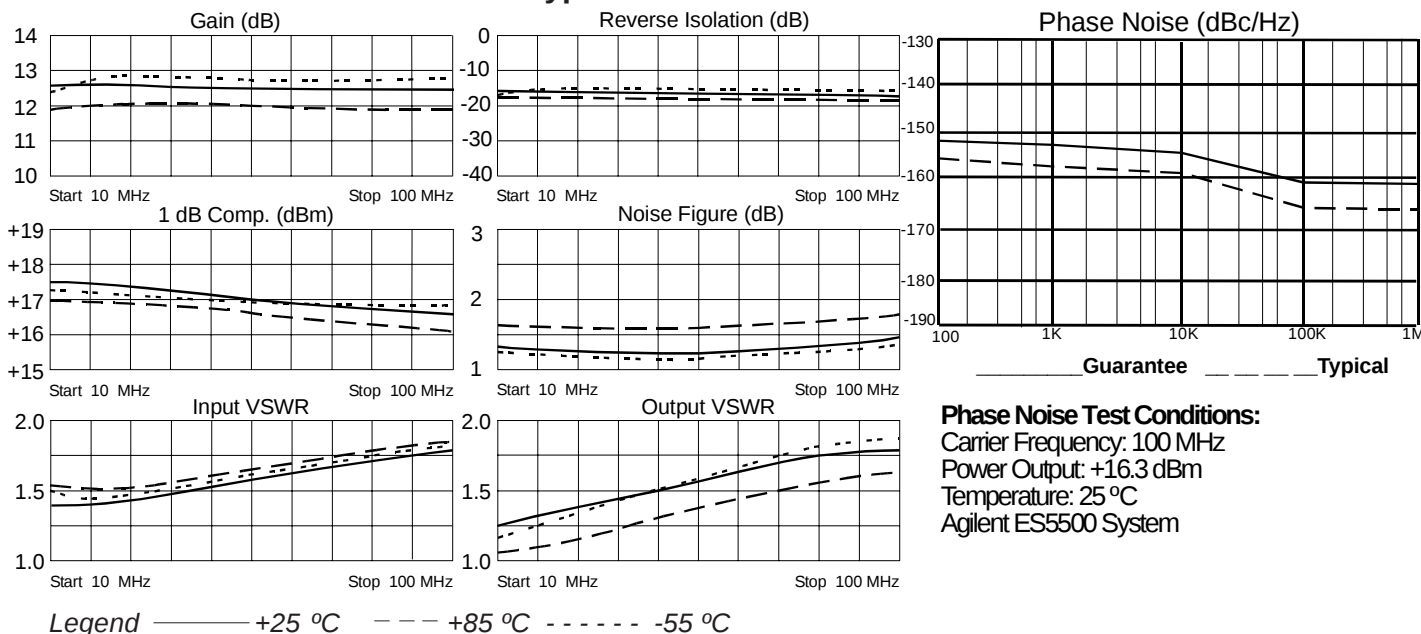

Phase Noise Test Conditions:

Carrier Frequency: 100 MHz
 Power Output: +16.3 dBm
 Temperature: 25 °C
 Agilent ES5500 System

Linear S-Parameters

FREQ. MHz	S11 Mag Deg	S21 Mag Deg	S12 Mag Deg	S22 Mag Deg
5	.16 177	4.24 5	.17 5	.10 23
10	.15 178	4.32 - 3	.17 - 3	.11 - 6
25	.16 -178	4.32 - 18	.17 - 17	.15 - 46
50	.21 175	4.26 - 38	.16 - 36	.21 - 80
75	.25 160	4.21 - 58	.16 - 56	.27 -102
100	.28 141	4.17 - 77	.15 - 74	.29 -119
150	.19 109	4.25 -123	.14 -119	.17 -128



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 3/31/04

www.SpectrumMicrowave.com Spectrum Microwave · 2707 Black Lake Place · Philadelphia, Pennsylvania 19154 · PH (215) 464-4000 · Fax (215) 464-4001