

RF AMPLIFIER

MODEL *TM7302*

Available As: TM7302, 4 Pin TO-8 (T4)
 TN7302, 4 Pin Surface Mount (SM3)
 BX7302, Connectorized Housing (H1)

Features

- High Output Power: +25 dBm Typical
- High IP3: +38 dBm Typical
- Operating Temp. - 55 °C to +71 °C

Typical Intermodulation Performance at 25 °C

Second Order Harmonic Intercept Point..... +54 dBm (Typ.)
 Second Order Two Tone Intercept Point..... +50 dBm (Typ.)
 Third Order Two Tone Intercept Point..... +38 dBm (Typ.)

Specifications


CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to 71 °C
Frequency	10-300 MHz	10-300 MHz
Gain (dB)	11.8	11 Min.
Power @ 1 dB Comp. (dBm)	+25	+23.5 Min.
Reverse Isolation (dB)	-16	-13.5 Max.
VSWR In	1.7:1	2.0:1 Max.
VSWR Out	1.7:1	2.0:1 Max.
Noise Figure (dB)	6	8 Max.
Power Vdc	+24	+24
mA	100	105 Max.

Note: Care should always be taken to effectively ground the case of each unit.

Maximum Ratings

Ambient Operating Temperature -55°C to + 85 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 80 °C
 DC Voltage + 25 Volts
 Continuous RF Input Power + 20 dBm
 Short Term RF Input Power ... 200 Milliwatts (1 Minute Max.)
 Maximum Peak Power 0.5 Watt (3 μsec Max.)

Typical Performance Data

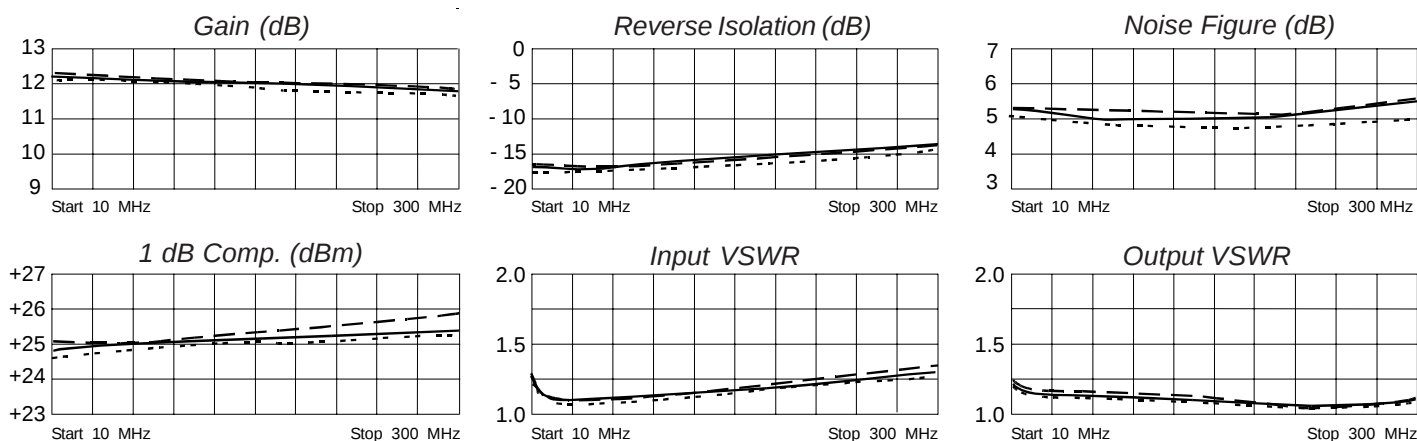

Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
10	.08	-79	4.04	-174	.1511	8	.10	55
50	.03	-30	4.00	168	.1535	3	.06	16
100	.04	-22	3.98	154	.1568	5	.07	5
150	.06	-32	3.96	140	.1638	6	.06	-3
200	.09	-48	3.96	126	.1723	6	.05	-7
250	.13	-67	3.93	111	.1842	5	.03	-1
300	.16	-85	3.87	96	.1952	4	.03	56



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 05/11/05

www.spectrummicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001