

DC Blocks SMA

**2 GHz – 3 GHz
Outer Only**


MODEL: 8519A

Technical Specifications

Parameter	Value
<i>Electrical</i>	
Frequency Range	2 GHz – 3 GHz
VSWR	1.15:1 max.
Impedance	50 Ohms
Insertion Loss	0.2 dB max.
Working Voltage	100 VDC max.
Operation Temp. Range	-54°C to +85°C
Storage Temp. Range	-54°C to +85°C

Parameter	Value
<i>Mechanical</i>	
SMA Connectors Mates with MIL-STD-348	Passivated Stainless Steel
Conductors	Gold Plated Beryllium Copper

Model Number: 8519A

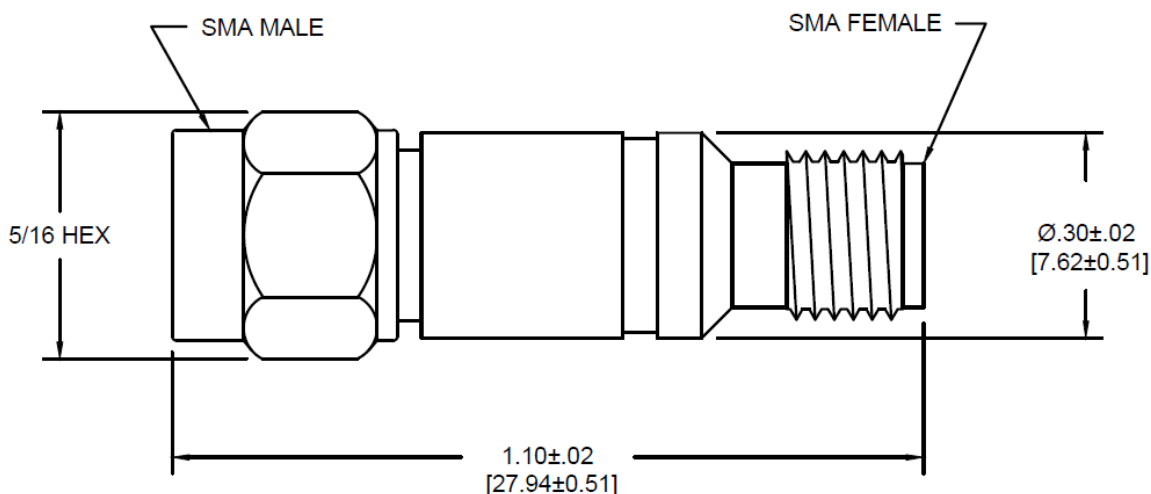

**Dimensions in brackets are expressed in millimeters and are for reference only.

sales@am.spectrumcontrol.com

Approved for Release: April 2025/Brown

Spectrum Control reserves the right to make changes to datasheets at any time without notice.