

RF AMPLIFIER

MODEL *TM9138*

Available as: TM9138, 4 Pin TO-8 (T4)
 TN9138, 4 Pin Surface Mount (SM3)
 FP9138, 4 Pin Flatpack (FP4)
 BX9138, Connectorized Housing (H1)

Features

- Medium Output Power: +19 dBm Typical
- Operating Temp. - 55 °C to +85 °C
- Environmental Screening Available

Typical Intermodulation Performance at 25 ° C

Second Order Harmonic Intercept Point.....+52 dBm (Typ.)
 Second Order Two Tone Intercept Point.....+46 dBm (Typ.)
 Third Order Two Tone Intercept Point.....+33 dBm (Typ.)

Specifications


CHARACTERISTIC	TYPICAL Ta= 25 °C	MIN/MAX Ta = -55 °C to +85 °C
Frequency	10 - 2000 MHz	10 - 2000 MHz
Gain (dB)	7.5	6.0 Min.
Power @ 1 dB Comp. (dBm)	+19	+16.5 Min.
Reverse Isolation (dB)	-9.75	-9 Max.
VSWR In	1.8:1	2.2:1 Max.
Out	1.5:1	2.2:1 Max.
Noise Figure (dB)	6.0	9.5 Max.
Power Vdc	+15	+15
mA	65	72 Max.

Note: Care should always be taken to effectively ground the case of each unit.

Maximum Ratings

Ambient Operating Temperature -55°C to + 100 °C
 Storage Temperature -62°C to + 125 °C
 Case Temperature + 125 °C
 DC Voltage + 18 Volts
 Continuous RF Input Power + 18 dBm
 Short Term RF Input Power..... 50 Milliwatts (1 Minute Max.)
 Maximum Peak Power..... 0.5 Watt (3 µsec Max.)

Typical Performance Data

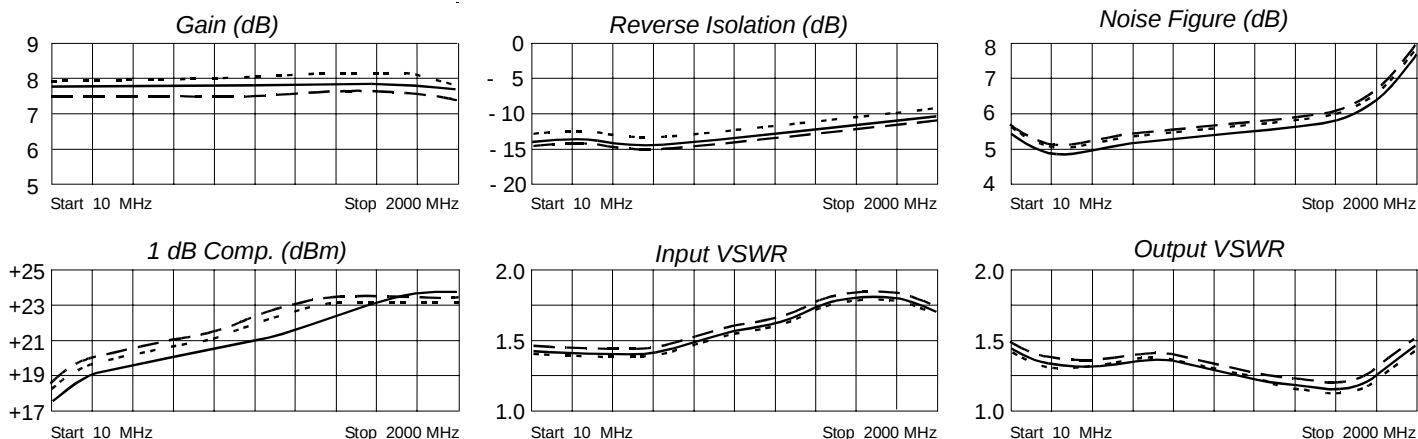

Linear S-Parameters

FREQ. MHz	S11		S21		S12		S22	
	Mag	Deg	Mag	Deg	Mag	Deg	Mag	Deg
10	.17	-148	2.49	-172	.19	10	.22	157
100	.16	-176	2.56	171	.20	2	.18	158
200	.16	180	2.56	160	.20	1	.17	143
400	.17	176	2.55	139	.20	2	.17	111
600	.17	174	2.53	119	.21	1	.18	80
800	.18	172	2.49	100	.22	-1	.17	49
1000	.19	170	2.46	82	.24	-3	.15	15
1200	.21	165	2.45	64	.25	-5	.14	-23
1400	.23	156	2.48	46	.27	-9	.13	-71
1600	.24	144	2.56	28	.30	-12	.16	-121
1800	.24	127	2.67	7	.33	-17	.23	-165
2000	.23	102	2.69	-20	.36	-27	.30	151



Spectrum Microwave · 2144 Franklin Drive N.E. · Palm Bay, Florida 32905 · PH (888) 553-7531 · Fax (888) 553-7532 07/29/04

www.spectrummicrowave.com Spectrum Microwave (Europe) · 2707 Black Lake Place · Philadelphia, Pa. 19154 · PH (215) 464-4000 · Fax (215) 464-4001