


Technical Specifications

Parameter	Value
Electrical	
Frequency Range	DC – 1 GHz
Resistance	50 & 100 ±5% Ohms (standard)
Power Handling*	80 Watt Average Derated linearity to 0 watt @ +150°C
Operating Temp. Range	-55°C to +150°C
Mechanical	
Substrate	Aluminum Nitride
Resistor Material	Proprietary Thin Film
Cover	Alumina Ceramic
Flange	Nickel Plated Copper
Tab	Gold Plated Beryllium Copper

Model: RA0BD0001

Legacy Model: ANR515-80

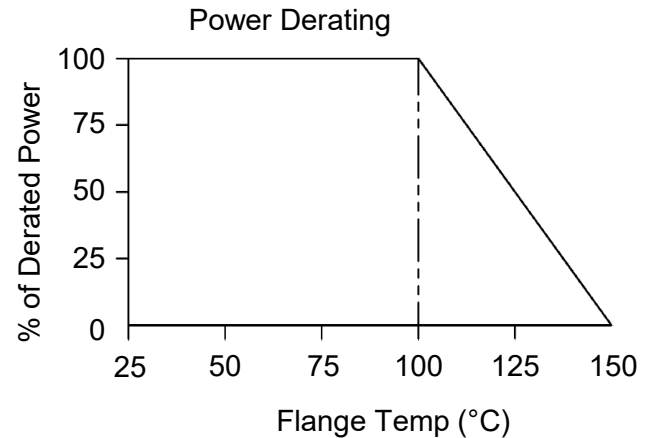


*Mounting surface shall not exceed 100°C max.

Model Number: RA0BD000150R0J shown

Tolerance: .XXX = $\pm .010$

**Dimensions in brackets are expressed in millimeters and are for reference only.

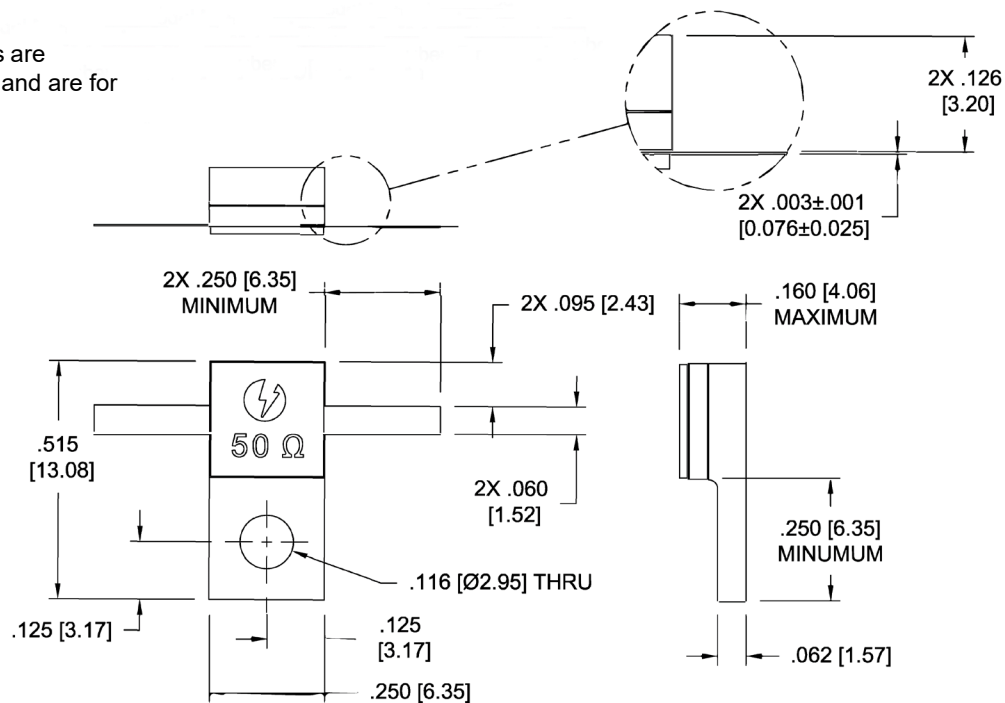

How To Order

RA0BD0001XXXXY

Ohm Value	Tolerance
50R = 50 Ohms	G = $\pm 2\%$
1000 = 100 Ohms	J = $\pm 5\%$
(Other values available)	