


CMN642 877 MHz Band Reject Filter

Passband: 880.02– 893.97 MHz

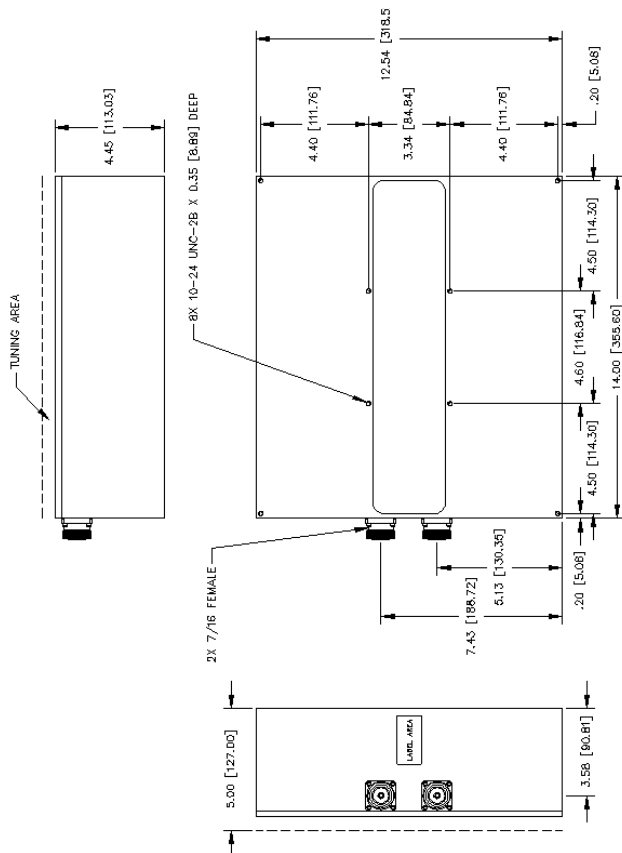

Features

- Insertion Loss 3.5 dB max
- Ripple 0.3 dB max
- Return Loss 18 dB min
- Rejection 50 dB min 894.125 – 895.50 MHz
- IM +44 dBm (25W) -120 dBm max with 2 carriers
- Connectors 7/16 Female
- Operating Temperature +5°C to +40°C