CMD130
DCS (specialized) Duplexer

Receive Channel	
Passband:	**1775 - 1795 MHz**
Insertion Loss:	**1.5 dB max.**
Return Loss:	**15.0 dB min.**
Rejection:	
1825 - 1845 MHz	**70 dB min**
Isolation Tx to Rx:	**70 dB min.**
Operation Temp:	**0° to +60°C**
Storage Temp:	**-40° to +85°C**

Transmit Channel	
Passband:	**1825 - 1845 MHz**
Insertion Loss:	**2.3 dB max.**
Return Loss:	**15.0 dB min.**
Rejection:	
1775 - 1795 MHz	**90 dB min.**
Isolation Rx to Tx:	**70 dB min.**
Power:	**35 Watts CW**

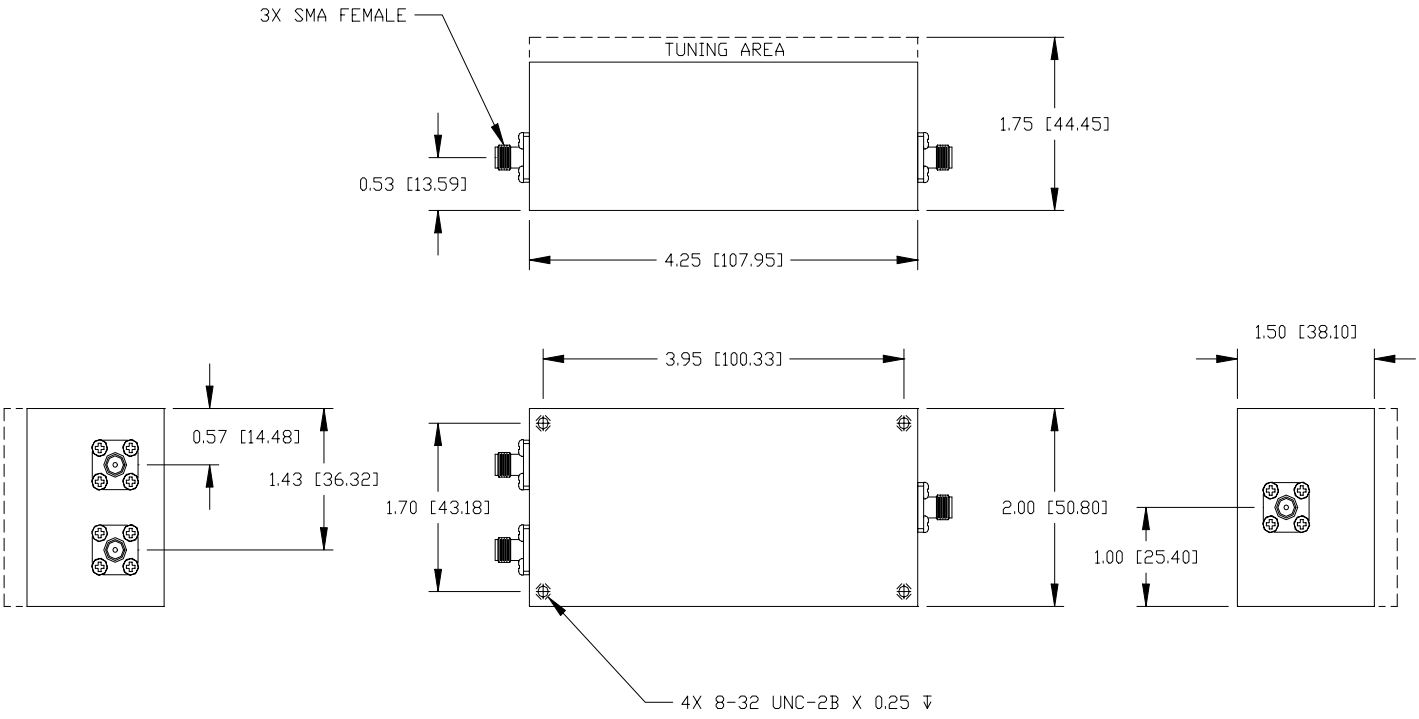

Commercial Microwave Technology, Inc.
11335 Sunrise Gold Circle, Rancho Cordova, CA 95742
Phone: 916-631-4363 • Fax: 916-631-4364
www.cmtfilters.com