

RESISTOR FLANGED

DC - 400 MHz 400 WATTS



MODELS: PPR1250-400-50R0J, PPR1250-400-1000J


SPECIFICATIONS:

Electrical:

Frequency Range _____ DC - 400 MHz
 Ohm Value _____ 50 & 100 ±5% Standard
 VSWR _____ 1.50:1 Typical
 Power _____ 400 Watt Avg.
 Based on flange temp. of 100°C Max.


Mechanical:

Substrate _____ Beryllium Oxide
 Cover _____ Alumina Ceramic
 Mounting Flange _____ Nickel Plated Copper
 Tab _____ Gold Plated Beryllium Copper

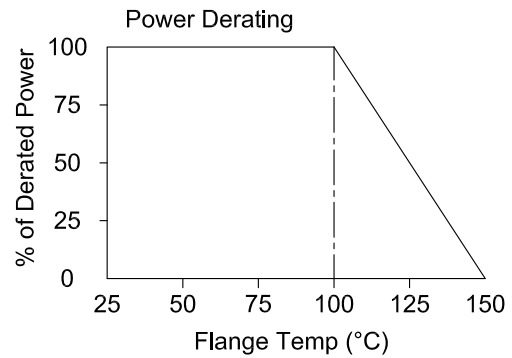

Model Number: PPR1250-400-XXXXY

.XXX ± .010 [0.25]

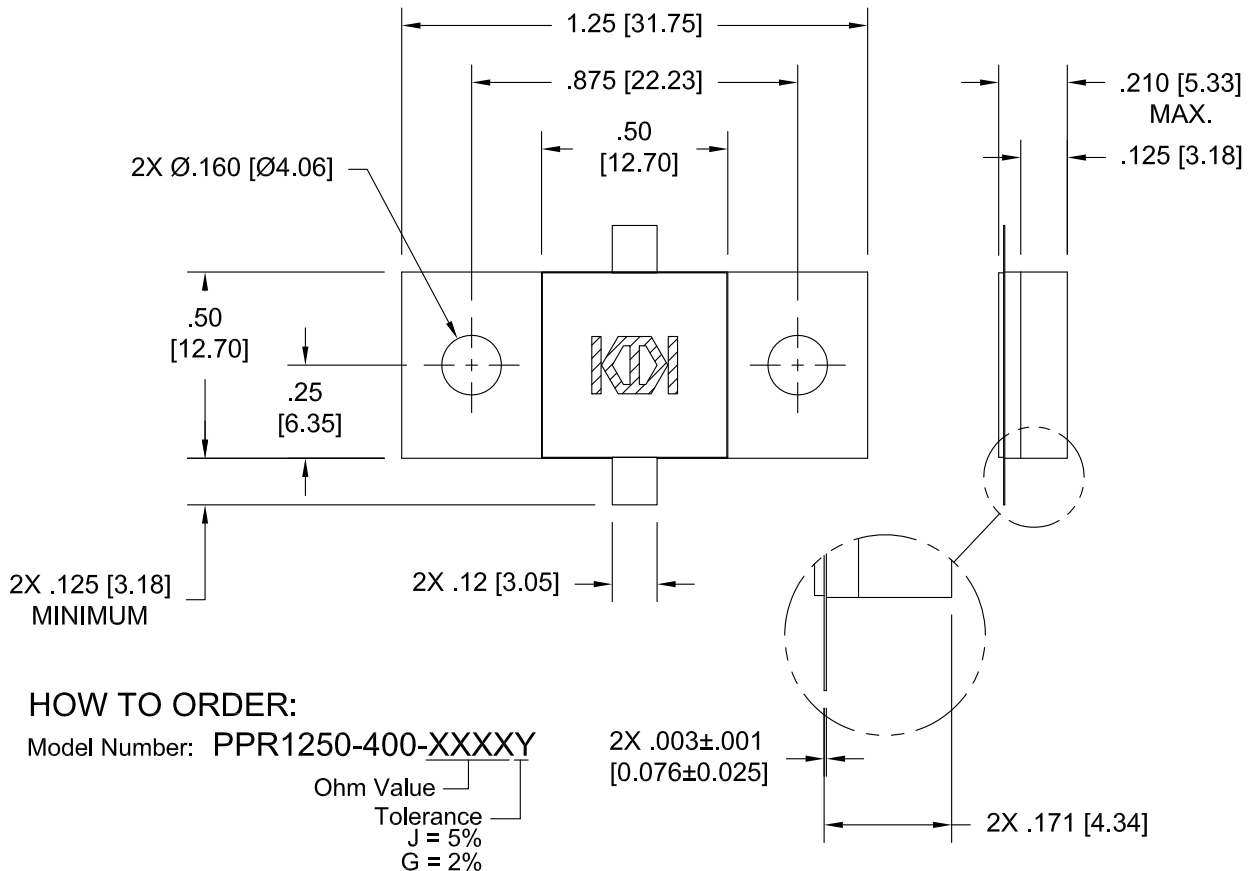

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
 Design specifications are subject to change without notice.
 Contact factory for technical specifications before purchasing or use.