

TERMINATIONS TYPE N MALE

**DC - 6.0 GHz
2 WATTS**



MODELS: 3201-NMY, 3202-NMY, 3204-NMY, 3206-NMY


SPECIFICATIONS:

Electrical:

Frequency Range _____ DC - 6.0 GHz
 VSWR _____ See Below
 Impedance _____ 50 Ohms
 Power _____
 Average _____ 2 Watts
 Peak _____ 500 Watts Maximum
 (1uSec Pulse, .01% Duty Cycle)
 Operating Temp Range _____ -55°C to +125°C
 2 Watt Avg. @ +25°C Derated Linearly
 to 10% of Rated Power @ +125°C

Mechanical:

Connectors & Housing _____ Brass and/or Zinc Alloy
 Conductors _____ Gold Plated Beryllium Copper
 ALL SOLDERED CONSTRUCTION FOR
 MAXIMUM RELIABILITY.

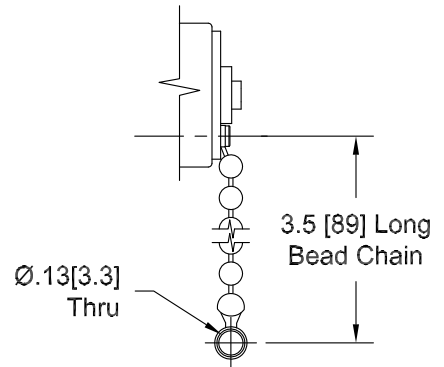

CHAIN DETAIL

Model Number: 3201-NMY


Frequency Range _____ DC - 1.0 GHz
 VSWR _____ 1.05:1 MAX.

Model Number: 3202-NMY

Frequency Range _____ DC - 2.5 GHz
 VSWR _____
 DC - 1.0 GHz _____ 1.05:1 MAX.
 1.0 - 2.5 GHz _____ 1.10:1 MAX.

Model Number: 3204-NMY

Frequency Range _____ DC - 4.0 GHz
 VSWR _____
 DC - 1.0 GHz _____ 1.05:1 MAX.
 1.0 - 4.0 GHz _____ 1.10:1 MAX.

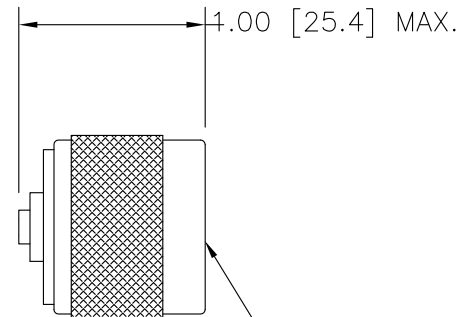

Type N Male Connector
(Mates with MIL-STD-348)

Model Number: 3206-NMY

Frequency Range _____ DC - 6.0 GHz
 VSWR _____
 DC - 1.0 GHz _____ 1.05:1 MAX.
 1.0 - 6.0 GHz _____ 1.20:1 MAX.

HOW TO ORDER:

Model Number: 320X-NMY

Frequency Range _____ Style _____
 1 = DC - 1 GHz = No Chain
 2 = DC - 2.5 GHz C = Chain Included
 4 = DC - 4 GHz
 6 = DC - 6 GHz

Ordering Examples:

Model Number: **3201-NMC**
 DC - 1 GHz; Type N Male; Chain Includ

Model Number: **3202-NM**
 DC - 2.5 GHz; Type N Male; No Chain

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
 Design specifications are subject to change without notice.
 Contact factory for technical specifications before purchasing or use.