

# Terminations & Loads



## Model 1453 Medium Power, N Connectors

dc to 8.5 GHz  
10 Watts



### Features

- /// Optimized for Wireless OEM and Test Applications.
- /// Designed to meet environmental requirements of MIL-D-39030.
- /// Quality Injection Molded Connector.

### Specifications

**NOMINAL IMPEDANCE:** 50 Ω

**FREQUENCY RANGE:** dc to 8.5 GHz

#### MAXIMUM SWR:

Frequency (GHz)	SWR
dc - 4	1.15
4 - 8.5	1.25

**POWER RATING:** 10 watts **average (mounted horizontally)** @ 25°C ambient temperature, derated linearly to 1 watt @ 125°C. 1 kilowatt **peak** (5 μsec pulse width; 0.5% duty cycle).

**TEMPERATURE RANGE:** -55°C to +125°C


**TEST DATA:** Swept data plots of SWR from 50 MHz to 12.4 GHz is available at additional cost.

**CONNECTOR:** Type N connector per MIL-STD-348 interface dimensions - mate nondestructively with MIL-C-39012 connector. Choice of male (-4) or female connector (-3).

**CONSTRUCTION:** Black, finned aluminum body, stainless steel connector; gold plated beryllium copper contacts.

**WEIGHT:** 85 g (3 oz)

#### PHYSICAL DIMENSIONS:

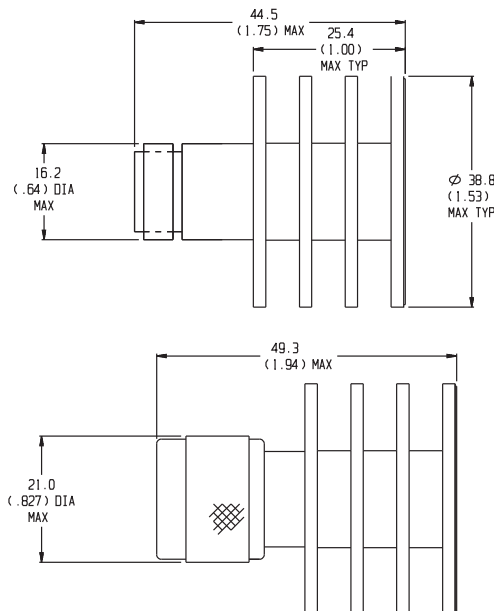

NOTE: All dimensions are given in mm (inches) and are maximum, unless otherwise specified.